







LARGE RANGE BORE GAUGES

Unit: mm

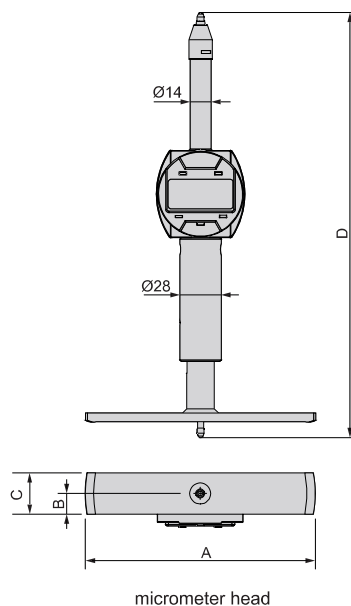


- Digital indicator reading in digital and analog
- Digital indicator display can be rotated by 320°
- Digital indicator can keep preset data and tolerance data in memory after restart
- Digital indicator button function:
tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement, data output
- Digital indicator power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery
- Carbide probes
- Data output
- Optional accessory: steel gauge block sets (code **4100**)
gauge block accessory (code **6981**)

Extension rods

Length (L)	Accuracy	Material
25mm	1µm	Chrome plated steel
50mm	2µm	Chrome plated steel
100mm	4µm	Chrome plated steel

Application

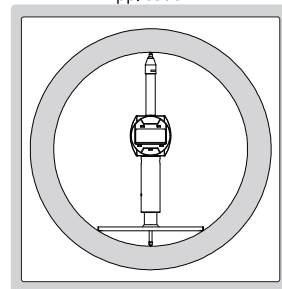

Micrometer head

Range	Resolution	Movable probe travel	Accuracy	Repeatability	Remark
180-205mm	0.001mm/0.00005"	13mm	7µm	2µm	13mm, 25mm fixed probe (included)
280-305mm	0.001mm/0.00005"	13mm	7µm	2µm	13mm, 25mm fixed probe (included)

Digital indicator code 2138-10F is included
(with data interface, optional wireless transmitter code 7315-50M, receiver is needed)

Code	Range (D)	Micrometer head range	A	B	C	Extension rods
2330-300	180-300mm	180-205mm	76.5mm	12.5mm	25mm	25mm, 50mm (2pcs)
2330-510	280-510mm	280-305mm	156mm	14mm	28mm	25mm, 50mm (2pcs), 100mm

Built-in wireless digital indicator code 2508-10FWL is included
(receiver code 7315-2/3/6/7/8/9, optional)

Code	Range (D)	Micrometer head range	A	B	C	Extension rods
2330-300WL	180-300mm	180-205mm	76.5mm	12.5mm	25mm	25mm, 50mm (2pcs)
2330-510WL	280-510mm	280-305mm	156mm	14mm	28mm	25mm, 50mm (2pcs), 100mm