


CAN BE CUSTOMIZED


DATA OUTPUT

DIGITAL COMPARISON GAUGES

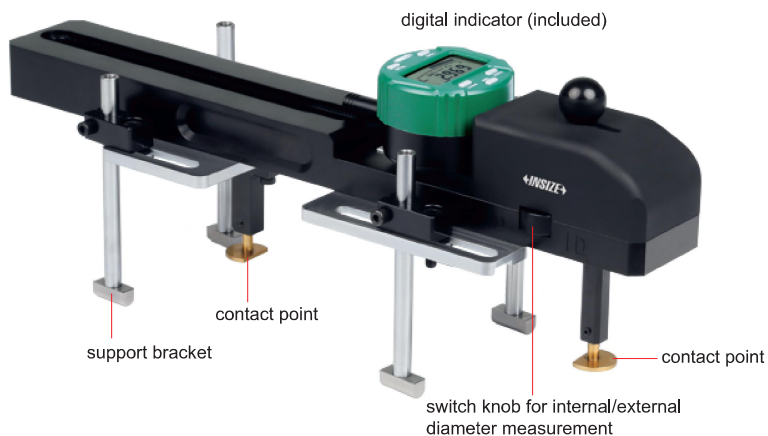


2514-300

- Measure internal diameter and external diameter
- Measuring force: 3-4N, point height is adjustable(h): 10-40mm
- Digital indicator display can be rotated by 320°
- Digital indicator button function: on/off, zero setting, tolerance Go and No-Go display, measuring direction change, max./min./TIR measurement, data preset, inch/metric conversion, data output, absolute/incremental measurement
- Digital indicator can keep preset data and tolerance data in memory after restart
- Digital indicator power:
 - with data interface: CR2032
 - built-in wireless: rechargeable lithium battery
- Optional accessory: gauge blocks (code **4101**)
gauge block accessory (code **6881**)

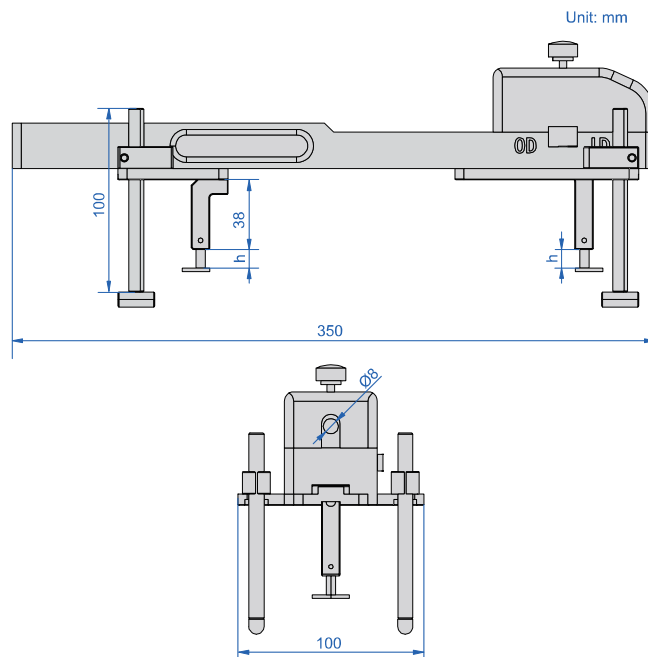

Contact points (included, supplied in pair)

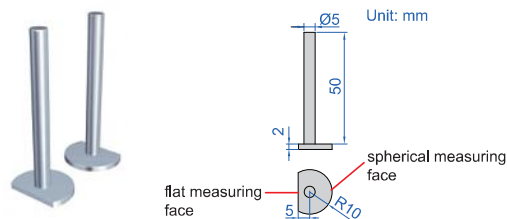

With data interface (optional wireless transmitter 7315-50M, receiver is needed)

Code	Range of internal/external diameter	Contact point stroke	Accuracy	Repeatability	Indicator
2514-300	100-300mm	10mm	5µm	2µm	Digital indicator, code 2138-10F , range 12.7mm/0.5", resolution 0.001mm/0.00005"

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code	Range of internal/external diameter	Contact point stroke	Accuracy	Repeatability	Indicator
2514-300WL	100-300mm	10mm	5µm	2µm	Digital indicator, code 2508-10FWL , range 12.7mm/0.5", resolution 0.001mm/0.00005"