


CONCENTRICITY GAUGES

ATTENTION: CALIBRATE BEFORE MEASUREMENT
 CALIBRATE WITH SETTING RING FOR TUBES
 CALIBRATE WITH CALIBRATION CYLINDER FOR CYLINDERS



4786-1

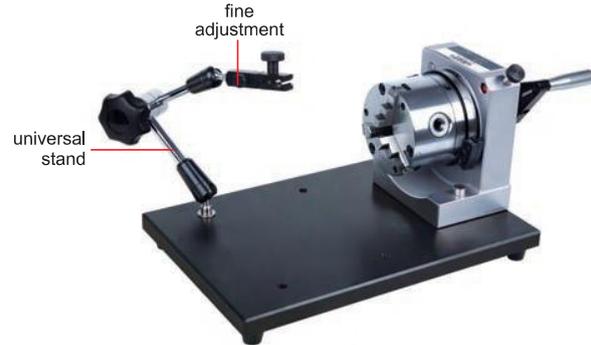

4786-2

- Accuracy: 3µm
- Ø50mm setting ring and Ø55mm calibration cylinder are included
- Optional accessory: dial test indicator



for cylinder



for tube



to ensure the accuracy 3µm, the distance between measuring point and roller should be <50mm

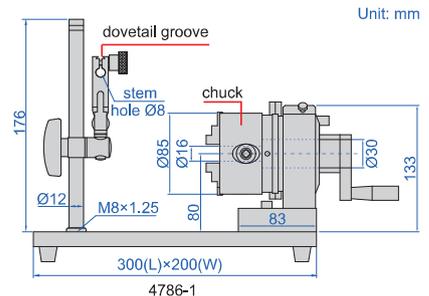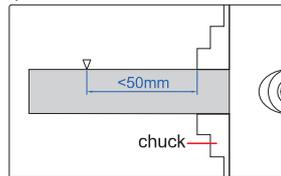

4786-1

| Code | Applicable inside diameter | Applicable outside diameter | Remark |
|--------|----------------------------|-----------------------------|---------------------------------------|
| 4786-1 | Ø24-64mm | Ø2-70mm | fixed stand, good rigidity |
| 4786-2 | Ø24-64mm | Ø2-70mm | universal stand, convenient operation |