



BUILT-IN BLUETOOTH DIGITAL LEVELS

MAGNETIC ON LEFT


BUILT-IN BLUETOOTH

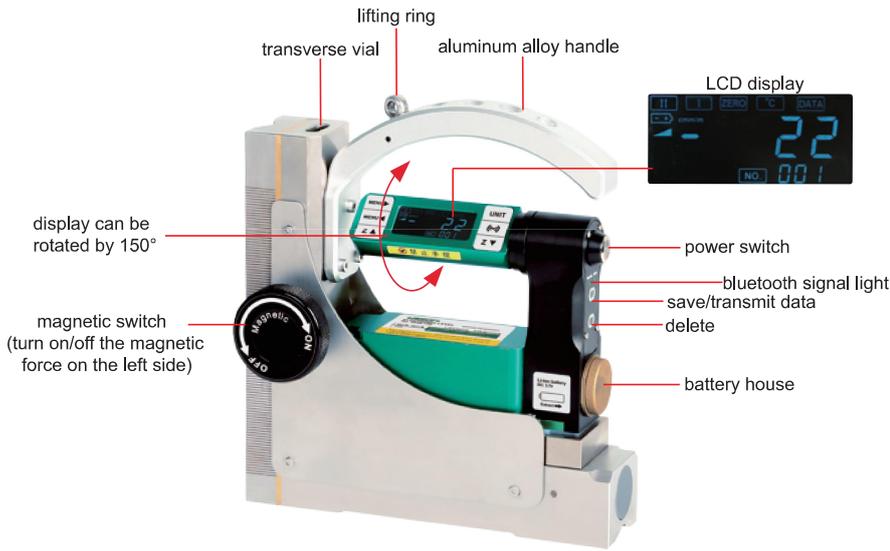


ISE-B200

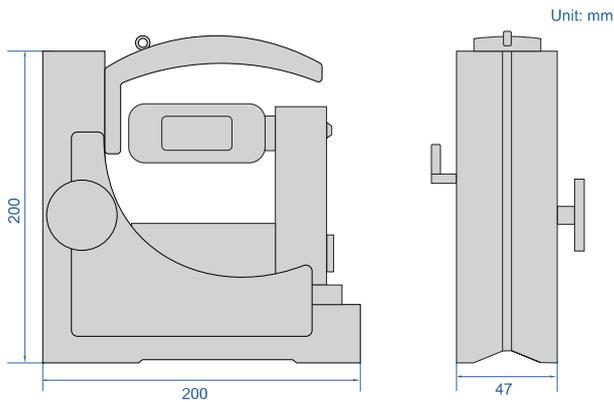

measuring and analysis software (included)

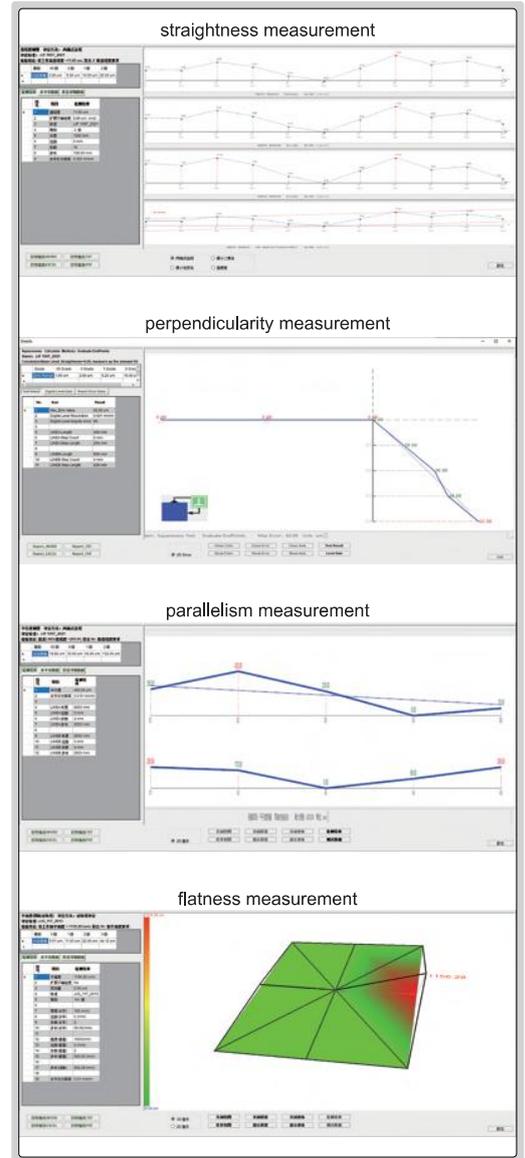

application
(measure the straightness and perpendicularity in two directions)

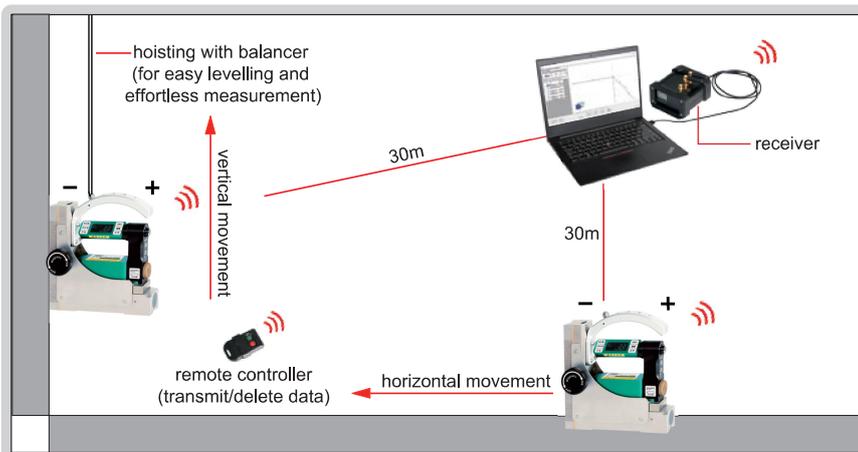

- Measures straightness, perpendicularity, parallelism and flatness
- Built-in bluetooth, transmission distance is 30 meters (under the condition of no obstruction and no electromagnetic interference)
- The LCD display can be rotated for easy observation in different directions
- Supplied with balancer to hold digital levels
- Supplied with measuring and analysis software

remote controller (included)



receiver (included)



4x21700 Li-ion batteries and charger (included)



balancer (included)



SPECIFICATION

| Code | ISE-B200 | | ISE-B200L | |
|-------------------------|--|------------------|---------------|----------------|
| Resolution (adjustable) | 0.01mm/m (2") | 0.001mm/m (0.2") | 0.01mm/m (2") | 0.005mm/m (1") |
| Range | ±5mm/m | ±0.5mm/m | ±5mm/m | ±2.5mm/m |
| Accuracy | ±(0.01+2%A)* | ±(0.001+2%A)* | ±(0.01+2%A)* | ±(0.005+2%A)* |
| Repeatability | 0.01mm/m | 0.001mm/m | 0.01mm/m | 0.005mm/m |
| Response time | <3s | <10s | <3s | <5s |
| Power supply | 1 x 21700 Li-ion battery, for 50h continuous working | | | |
| Magnetic force | 10kgf/cm ² | | | |
| Net weight | 5kg | | | |

*A is the absolute measured value, for example A=0.1mm/m, the resolution is 0.001mm/m, the accuracy is ±0.003mm/m

STANDARD DELIVERY

| | |
|---------------------------------|------|
| Main unit | 1pc |
| Remote controller | 1pc |
| Receiver | 1pc |
| Measuring and analysis software | 1set |
| Balancer | 1pc |
| Charger | 1pc |
| 21700 Li-ion battery | 4pcs |

OPTIONAL ACCESSORY

| | |
|--------------------|---------|
| 300mm bridge plate | 4952-01 |
| 200mm bridge plate | 4952-02 |
| 500mm bridge plate | 4952-03 |

300mm bridge plate (optional)

