
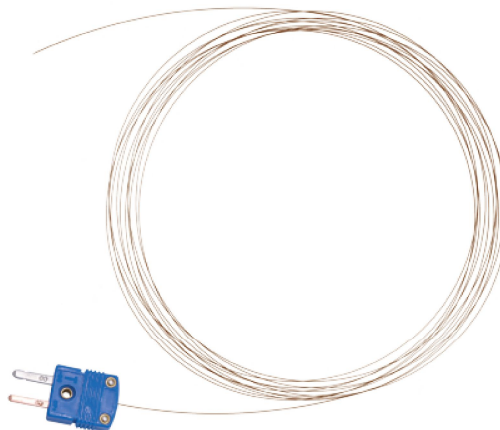


T-TYPE ULTRAFINE THERMOCOUPLES

CODE 0706-□□□

- Ultra-fine thermocouple wire diameter for temperature measurement in very small spaces

Code explanation:



0706-T1W1L2

Code example:

0706-T1W1L2	T1-temperature range: -200°C~200°C thermocouple wire dimension: 0.08mm
	W1-wiring method: plug
	L2-lead length: 1m

SPECIFICATION

Thermocouple type	T		
Thermocouple wire material	Cu vs Cu-Ni		
Insulating layer material	polyurethane	polyurethane	polyimide
Thermocouple wire diameter	0.08mm	0.05mm	0.08mm
Outer diameter dimension	0.1×0.2mm	0.08×0.12mm	0.1×0.2mm
Temperature range	-200°C~200°C	-200°C~200°C	-200°C~300°C
Temperature accuracy	±0.5°C or 0.004· t	±0.5°C or 0.004· t	±0.5°C or 0.004· t

TEMPERATURE RANGE AND THERMOCOUPLE WIRE DIAMETER

T1	temperature range: -200°C~200°C thermocouple wire dimension: 0.08mm
T2	temperature range: -200°C~200°C thermocouple wire dimension: 0.05mm
T3	temperature range: -200°C~300°C thermocouple wire dimension: 0.08mm


WIRING METHOD

W1	plug
W2	pin

wiring method: W1



wiring method: W2



LEAD LENGTH

L1	0.5m
L2	1m
L3	2m
L4	3m
L5	5m