


## DIGITAL CALIPERS FOR BORES WITH BARRIER INSIDE

DATA  
OUTPUT



1513-200

Unit: mm

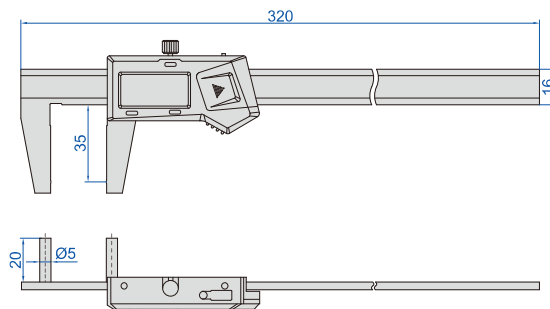

- Non waterproof
- Measure diameter of bores with barrier inside
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel

With data interface (optional data output cable:  
code 7315-25 need receiver, 7302-21)

Code	Range (ØD) *	Diameter of barrier (Ød)	Accuracy
1513-200	10-200mm/0.4-8"	<D-10mm (less than 70mm)	±0.03mm

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required)

Code	Range (ØD) *	Diameter of barrier (Ød)	Accuracy
1513-200WL	10-200mm/0.4-8"	<D-10mm (less than 70mm)	±0.03mm

application



\*For example:

When measuring size (ØD) is 40mm, D-10=30mm, so the diameter of barrier (Ød) should be less than 30mm.  
When measuring size (ØD) is 100mm, D-10=90mm, however it should be less than 70mm,  
so the diameter of barrier (Ød) should be less than 70mm.